

Application for Sanitary Sewer Permit

4000 North Olcott Avenue

Norridge, Illinois 60706

Phone: 708.453.0311 ■ Fax: 708.453.1971

buildingdepartment@villageofnorridge.com

Property Owner Information (please print)

First Name/Business Name		Last Name	
Property Address		Unit #	
Home/Business Phone	Cell Phone	Other (email, fax, etc.)	
Owner (if different)	Address	City, State, Zip	
Owner Phone	PIN	24 Hour Emergency Number	

Valuation and Permit Fee

Valuation of Work \$	Permit Fee \$	Stop Work Order Fee \$
----------------------	---------------	------------------------

Project Information

Description of work being done (be specific/connection, repair, other):

JULIE Dig #

Contractor Information (please print)

Company Name		
Street Address		
City	State	Zip
Business Phone	Business Fax	Other (cell, email, etc.)

- If digging in Public Property an excavation permit is required.
- Connection to an existing main sewer must be made with an M-D cut in sewer connection.
- No storm water to enter sanitary sewer and no downspouts permitted to be connected to the sanitary sewer.

Office Use Only

Received By	Date Received
Approved By	Date Approved
Permit Number	Date Issued

Applicant Signature

Print Name

Date



BUILDING DEPARTMENT

Village of Norridge • 4000 N. Olcott Ave. • Norridge, IL 60706 • P 708.453.0311 • F 708.453.1971 • buildingdepartment@villageofnorridge.com

BUILDING DEPARTMENT FOR YOUR SAFETY

INSPECTIONS: It is the responsibility of either the contractor or the homeowner to obtain all required trade inspections. Appointments are to be made not less than 24 hours prior to the inspection date and time requested. All exposed construction materials, during the course of the project, will be brought up to applicable code requirements. Additional trade permits may need to be applied for once any existing violation is discovered. A “*rough inspection*” is required before all permitted work is either closed over or covered over for all trade codes involved in the project. A “*final inspection*” is required upon completion of all permitted work prior to the expiration of the permit. All inspection reports must be available to the inspectors on the job site. All work must be visible to the inspector.

If the permit expires prior to the final inspection it must be renewed and additional fees will be required.

Permission is granted for Village of Norridge Building Inspector to enter the property for observation of a permitted project or verification of application for permit.

This inspection can be by either appointment or by absence of property owner or principle agent contracted to perform trade work as stated on permit.

Building Codes Enacted by the Village of Norridge

Illinois Accessibility Code 2018	International Property Maintenance Code 2018
International Building Code 2018	International Residential Code 2018
Illinois Plumbing Code 2014	International Solar Energy Provisions 2018
International Energy Conservation Code 2018	International Swimming Pool and Spa Code 2018
International Existing Building Code 2018	International Urban-Wildland Code 2018
International Fire Code 2018	National Electric Code 2017
International Fuel Gas Code 2018	NFPA Life Safety Code 2015
International Mechanical Code 2018	Village Amendments

Failure to obtain a “rough inspection” may result in the inspector requiring removal of any building materials or fill to observe workmanship and code requirements. Failure to obtain a “final inspection” prior to the expiration of the permit will result in penalties and fines. By signing Building Department forms, I certify the information on this application is correct and complete.

Acknowledgement of requirements listed above:


Contractor/Homeowner Signature

Date

Print Name

Company Name

Authorized Building Department Agent

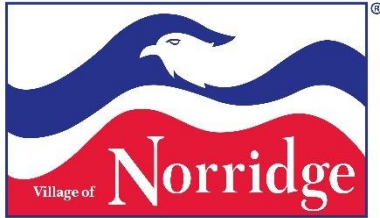

REQUIREMENTS FOR A SEWER

Village of Norridge • 4000 N. Olcott Ave. • Norridge, IL 60706 • P 708.453.0311 • F 708.453.1971 • buildingdepartment@villageofnorridge.com

Requirements for Installing a Sanitary Sewer:

- ❑ 6" SDR SCD 26 pipe and fittings
 - Full size c/o
- ❑ If allowed to use the existing sewer, the connection is to be made using non-shear mission couplings.
 - This sewer must be televised for approval to be used.
- ❑ When connecting to the main a saddle fitting is to be used and the main must be cored. (Save the plug for Village inspector)
- ❑ A lock type bushing can be used on concrete pipe.
- ❑ The old sewer service must be capped or plugged and taken out of service.
- ❑ Pipes must be bedded in sand or stone.

Requirements for Installing a Storm Sewer:

- ❑ SDR 26 pipe and fittings are to be used
- ❑ All homeowners' connection must go to a Type C basin before connecting to our storm sewer.
- ❑ If applicable tie into the inlet or basin.
- ❑ When connecting to the main, it must be cored. (Save plug for inspection)
- ❑ Saddle or lock type bushings can be used depending on the pipe

When directional boring or pneumatic method i.e. bullet is used for water service or sewer service, all existing underground utilities are to be pot holed for verification of elevations.